

Control- and safety isolating transformer ST 63/23/24



Picture shows ST 160/23-23

Advantages

| |
|--|
| Very good switch-on behaviour thanks to reduced starting currents |
| High power density due to a compact construction design |
| Primary side $\pm 5\%$ tapings for voltage adjustment |
| Very good corrosion protection and low noise thanks to vacuum impregnation |
| Contact protected screw connection terminals complying with UVV BGV A3 |
| Simple mounting thanks to robust metal footplate with oval slots |


Applications

As a control transformer for the electrical isolation of the input and output sides. The construction of the transformer to supply control systems according to VDE 0113 is designed.

As an isolating transformer for the safe electrical isolation of the input and output sides. The transformer may be used to set up protective separation as a protective measure in accordance with VDE 0100.

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application



Standards



Control transformer
to: VDE 0570 Teil 2-2, DIN EN 61558-2-2, EN 61558-2-2, IEC 61558-2-2,
UL 5085-1/-2, CSA 22.2 No.66
Safety isolating transformer
to: VDE 0570 Teil 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6, UL
5085-1/-2, CSA 22.2 No.66

Approvals




VDE, UL 5085-1/-2, CSA 22.2 No.66



Control- and safety isolating transformer ST 63/23/24

| Type | | ST 63/23/24 |
|--|----------------------------------|---|
| Electrical data | Input | |
| | Rated input voltage | 230 Vac |
| | Tappings Input | ±5 % |
| | Rated frequency | 50 - 60 Hz |
| | Output | |
| | Rated output voltage | 24 Vac |
| | Rated power VDE (DB cos phi=1) | 63 VA |
| | Rated power VDE (KB cos phi=0.5) | 110 VA |
| | UL Derating | - |
| | No-load voltage (app. x factor) | 1.10 |
| | Efficiency | 84.0 % |
| | Standards | |
| | Classification | Control- and safety isolating transformer |
| | Approvals | |
| | Approvals | cURus, VDE |
| | Environment | |
| | Ambient temperature max. | 40 °C |
| | Type of cooling | self-cooling |
| | Safety and protection | |
| Type | Open type | |
| Insulation class | VDE=B, UL=class 105 | |
| Protection index | IP 00 | |
| Safety class (prepared) | I | |
| Short circuit strength | non-short-circuit proof | |
| PRI Fusing recommendation by circuit breaker with tripping characteristic type 20 x I _{rated} related to set) | | |
| Setting range | 0.25 - 0.40 A | |
| Setting value | 0.33 A | |
| Order numbers | | |
| Order Number | ST 63/23/24 | |

| Type | | ST 63/23/24 |
|-----------------|-----------------------|------------------------------------|
| Mechanical data | Terminal and mounting | |
| | Terminals | Screw-type terminals, PE 6.3 x 0.8 |
| | Fixing method | Base plate |
| | Fixing screws | M4 |
| | Measures and weights | |
| | Weight | 1.10 kg |

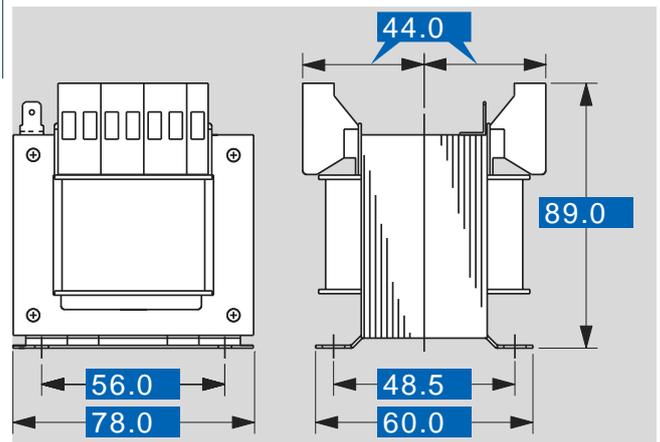

Subject to change.